


DELTA/ANGLED HIP/RIDGE CAP  
NAILED TO BATTENS

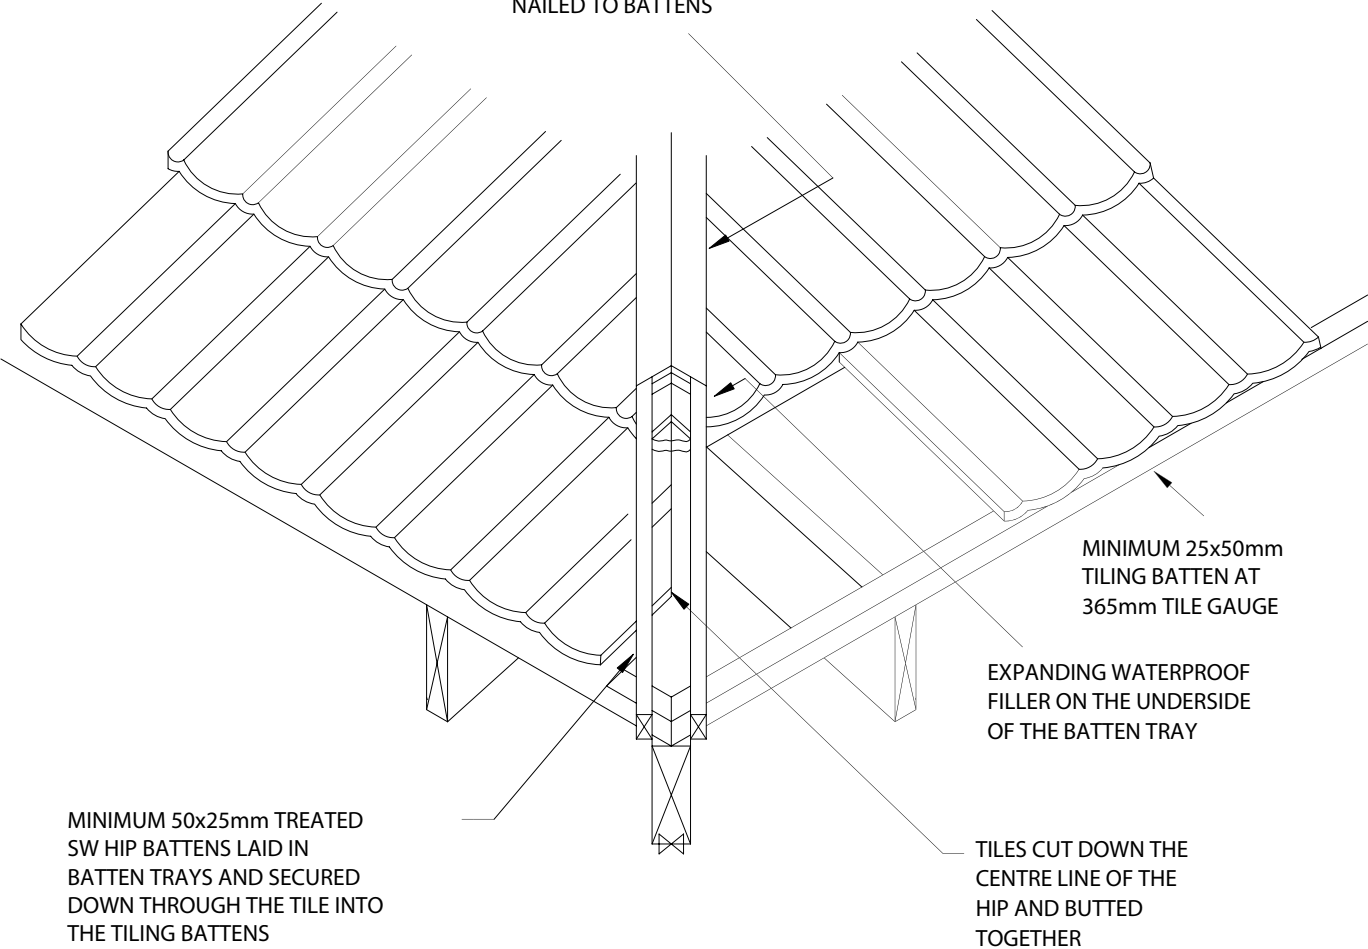


MINIMUM 25x50mm  
TILING BATTEN AT  
365mm TILE GAUGE

EXPANDING WATERPROOF  
FILLER ON THE UNDERSIDE  
OF THE BATTEN TRAY

TILES CUT DOWN THE  
CENTRE LINE OF THE  
HIP AND BUTTED  
TOGETHER

MINIMUM 50x25mm TREATED  
SW HIP BATTENS LAID IN  
BATTEN TRAYS AND SECURED  
DOWN THROUGH THE TILE INTO  
THE TILING BATTENS

 <b>Lightweight Steel Roofing</b>  Metrotile UK Ltd., Unit 3, Sheldon Business Park, Sheldon Corner, Chippenham, Wiltshire SN14 0RQ. Tel: +44(0) 1249 658514 Fax: +44(0) 1249 658453 Email: sales@metrotile.co.uk www.metrotile.co.uk	CONTENT <b>METROTILE HIPS</b>	DRAWING SCALE <b>NOT TO SCALE</b>
		DRAWING NUMBER <b>M-015</b>
		DATE <b>JANUARY 2002</b>
		REVISION