


METROSHINGLES FIXED WITH CEMENT COATED GALVANISED NAILS

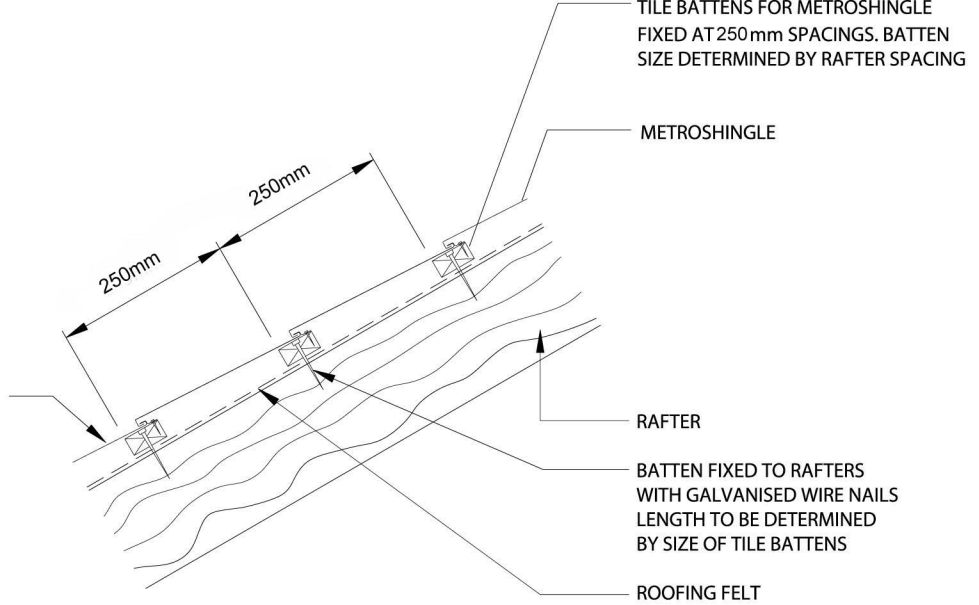

ENSURE FRONT EDGE OF METROSHINGLE TO BE SECURELY FITTED INTO SHAPED REAR EDGE OF SHINGLE BELOW BEFORE NAILING


METROSHINGLE FIXED WITH GALVANISED NAILS THROUGH REAR EDGE

BATTEN FIXED TO RAFTERS WITH GALVANISED NAILS. LENGTH TO BE DETERMINED BY SIZE OF TILE BATTEN

METROSHINGLE

BATTEN

ROOFING FELT

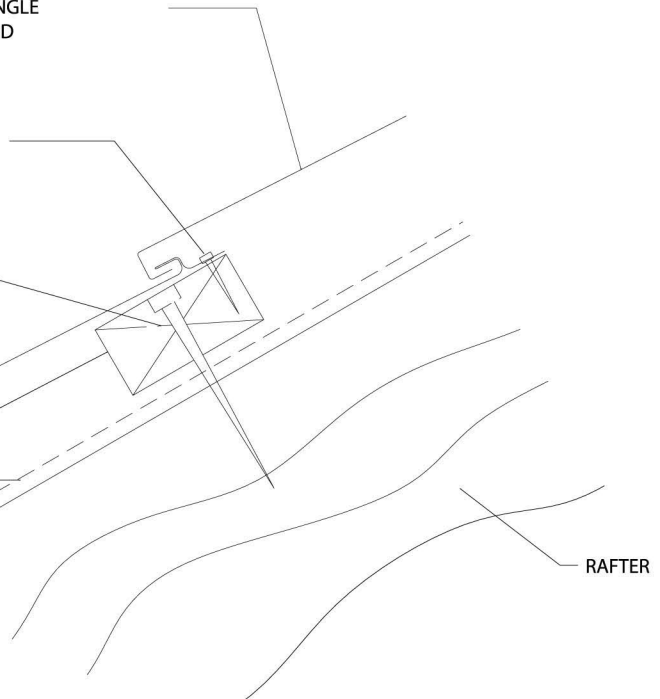

Metrotile
Lightweight Steel Roofing

Metrotile UK Ltd.,
Unit 3, Sheldon Business Park, Sheldon Corner,
Chippenham, Wiltshire SN14 0RQ.
Tel: +44(0) 1249 658514 Fax: +44(0) 1249 658453
Email: sales@metrotile.co.uk. www.metrotile.co.uk.

CONTENT

**METROSHINGLE
BATTEN SPACING &
NAIL FIXINGS**

DRAWING SCALE

1:10

DRAWING NUMBER

M-020

DATE

MARCH 2002

REVISION